

Design of Microstrip Antenna for WLAN

Rashid A. Saeed and Sabira Khatun
Communication and Network Laboratory,
Department of Computer and Communications, Universiti Putra Malaysia, Malaysia

Abstract: This study presents theoretical investigation and simulation of Input Impedance behavior of nearly square single fed aperture coupled microstrip patch antenna that can satisfy the narrowband WLAN applications with 2.4 GHz band with 80 MHz bandwidth. For maximum coupling the patch should be centered over the slot, moving the patch relative to the slot in the H-plane direction has little effect, while moving the patch relative to the slot in the E-plane (resonant) direction will decrease the coupling level, also for maximum coupling, the feed line should be positioned at right angles to the center of the slot. Skewing the feed line from the slot will reduce the coupling, as will positioning the feed line towards the edge of the slot. Position of the feed line in different places relative to patch also was presented.

Key words: Microstrip antenna, WLAN, input impedance

INTRODUCTION

Mathematical modeling of the basic microstrip radiator was initially carried out by the application of transmission-line analogies to simple rectangular patch fed at the center of radiating wall. The radiation pattern of a circular patch was analyzed and measurements reported by Carver^[1]. The first mathematical analyze of a wide variety of microstrip patch shapes was published in 1977 by Bahl and Bhartia^[2], which he used the modal-expansion technique to analyze to rectangular, circular, semicircular and triangular patch shapes.

High speed, broadband and high capacity in or outdoor wireless local area networks (WLAN) are becoming more and more predominant today, its interesting to become familiar with some of the aspects of wireless design that must be faced and overcome. The advantages of microstrip antennas have made them a perfect candidate for use in the wireless local area network (WLAN) applications. Though bound by certain disadvantages, microstrip patch antennas can be tailored so they can be used in the new high-speed broadband WLAN systems and other applications, e.g. PCS, Bluetooth, RFID, etc.

Foundations for microstrip design: A microstrip patch antenna is a radiating patch on one side of a dielectric substrate, which has a ground plane on the underside^[3]. The EM waves fringe off the top patch into the substrate, reflecting off the ground plane and radiates out into the air. Radiation occurs mostly due to the fringing field between the patch and ground (Fig. 1).

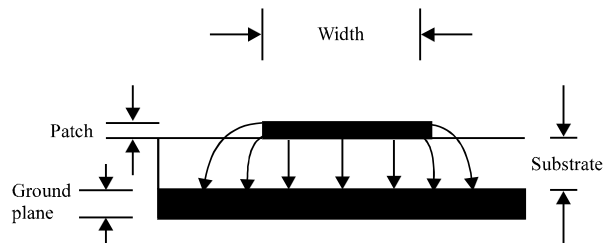


Fig. 1: Operations of microstrip patch

The radiation efficiency of the patch antenna depends largely on the permittivity (ϵ_r) of the dielectric. Ideally, a thick dielectric, low ϵ_r and low insertion loss is preferred for broadband purposes and increased efficiency. The advantages of microstrip antenna that they are low-cost, conformable, lightweight and low profile, while both linear and circular polarization easily achieved. These attributes are desirable when considering antennas for WLAN systems. Disadvantages of microstrip antenna include such as a narrow bandwidth, a low gain (~6 dB) and polarization purity is hard to achieve^[3].

Polarization types: Usually the polarization of the wave radiated by the antenna in a particular direction. This is usually dependant on the feeding technique. When the direction is not specified, it is in the direction of maximum radiation^[4]. Two most widely polarizations (linear and circular) are shown in Fig. 2 and 3.

Linear polarization: A slot antenna is the counter part and the simplest form of a linearly polarized antenna. On a slot antenna the E field is orientated perpendicular to its length dimension. The usual microstrip patches are just different variations of the slot antenna and all radiate due to linear polarization. Figure 2 illustrates the operations of a linearly polarized wave radiating perpendicular to the patch plane.

Circular polarization: Circular polarization (CP) is usually a result of orthogonally fed signal input. When two signals of equal amplitude have 90° phases, the resulting wave is circularly polarized. Circular polarization can result; left hand circularly polarized (LHCP) where the wave with anticlockwise, or right hand circularly polarized (RHCP) wave with clockwise rotation. The main advantage of CP is that regardless of receiver orientation, it will always able receiving a component of the signal. This is due to the resulting wave having an angular variation.

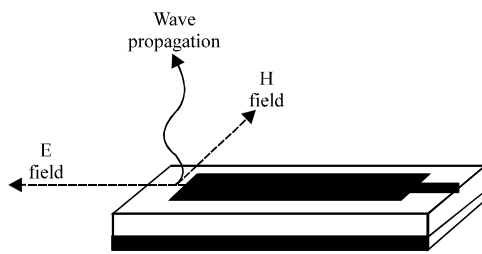


Fig. 2: Microstrip antenna patch with linear polarization wave

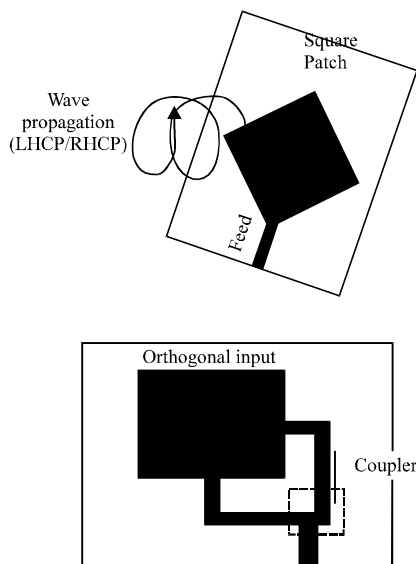


Fig. 3: Two type of microstrip patch with circular polarization wave

Bandwidth: The bandwidth of the patch is defined as the frequency range over which it is matched with that feed line within specified limits^[5]. In other words, the frequency range over which the antenna will perform satisfactorily. This means the channels have larger usable frequency range and thus results in increased transmission. The bandwidth of an antenna is usually defined by the acceptable standing wave ratio (SWR) value over the concerned frequency range.

$$BW = \frac{SWR & 1}{Q \sqrt{SWR}} \tag{1}$$

Where, Q is a qualify factor.

The Fig. 4 shows a typical narrow and broadband phenomenon in terms of frequency band usage.

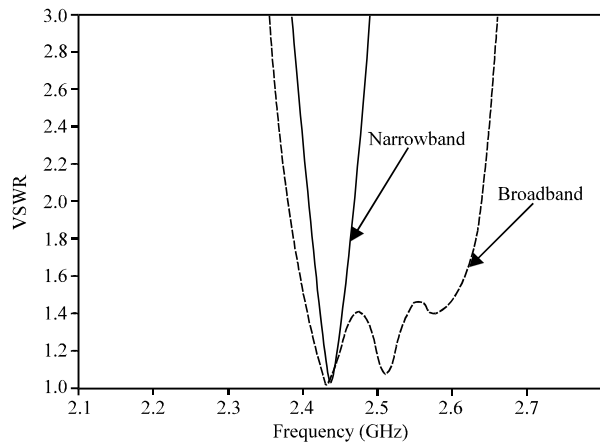


Fig. 4: Narrowband and broadband for microstrip antenna

Feeding techniques: Feeding technique influences the input impedance and polarization characteristics of the antenna. There are three most common structures that are used to feed planar printed antennas. These are coaxial probe feeds, microstrip line feeds and aperture coupled feeds.

For aperture-coupled a feed, which is used in this study the microstrip feed line, is etched on the bottom of the feed substrate.

Aperture coupled microstrip antennas: In an aperture-coupled feed, which is another type of electro magnetically coupled (EMC) feed; the RF energy from the feed line is coupled to the radiating element through a common aperture in the form of a rectangular slot. This type of feed was first proposed by Pozar^[6]. The aperture coupled feeding mechanism is shown in Fig. 5.

Figure 5 shows the geometry of the basic aperture coupled patch antenna that is designed in this work and

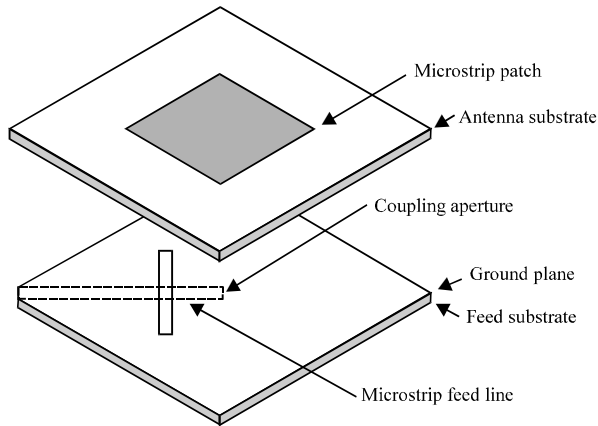


Fig. 5: Geometry of the aperture coupled microstrip antenna with corner feeding for circular polarization

considered in simulation parameters. The radiating microstrip patch element is etched on the top of the antenna substrate and the microstrip feed line here is etched of the corner of bottom of the feed substrate. Rectangular slot 45° is also used the nearly square ground plane.

Designs and simulation procedure: The aim of this design is to provide a good performance in input impedance resonant frequency matching and perfect circular polarization for WLAN requirements, The design parameters; considered here are as follows:

Substrate thickness: Substrate thickness should be chosen as large as possible to maximize bandwidth and efficiency, but not so large as to risk surface-wave excitation. For maximum operating frequency f_u the substrate thickness (h)^[7] should satisfy:

$$h \leq \frac{0.3 c}{2Bf_u \sqrt{g_r}} \quad (2)$$

Where, g_r is the relative dielectric constant obtained using resonant line method^[6] and c is the light speed.

Antenna patch dimensions: The patch length is determined by condition for resonance. This occurs when the input impedance is purely real^[8]. For nearly square geometry the length (l) must slightly greater than the width (w), to obtain an initial value of l:

$$L \approx \frac{c}{2f_r \sqrt{g_r}} \quad (3)$$

$f_r = 2.45$ GHz. Using equation (3) we can calculate the effective relative permittivity (g_{eff}) as follows:

$$g_{eff} \approx \frac{g_r \cdot l}{2} \approx \frac{g_r \cdot l}{2} \left(1 \pm 1.2 \frac{h}{w}\right)^{0.5} \quad (4)$$

To calculate patch width the following equation used.

$$w \approx \frac{c}{2f_r} \left(\frac{g_r \cdot l}{2}\right)^{0.5} \quad (5)$$

For improved value of l we can find the fringe factor dl.

$$dL \approx 0.412h \frac{(g_{eff} \pm 0.3) (w/h \pm 0.264)}{(g_{eff} \pm 0.258) (w/h \pm 0.8)} \quad (6)$$

The foregoing procedure may be repeated with a result that improves l.

Excitation: Figure 5 shows that it is possible to excite the two modes (TM_{10} , TM_{01}) using one feed by introducing a small perturbation in the patch and it radiates Right-Hand Circular Polarization (RHCP). For (LHCP) feed is placed on other diagonal^[9]. In this simulation different location for the feeder were used.

RESULTS AND DISCUSSION

Analytical results are obtained using equations 1-6 with the help of FORTRAN simulation software and compared with^[10] for verification.

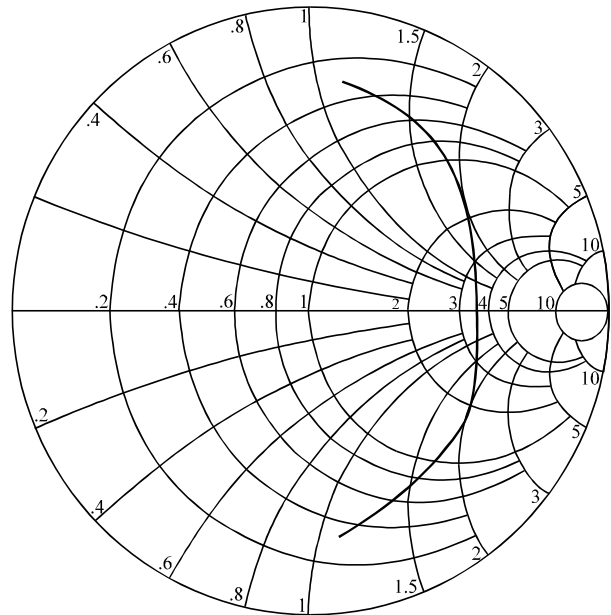


Fig. 6: Input impedance for microstrip rectangular patch

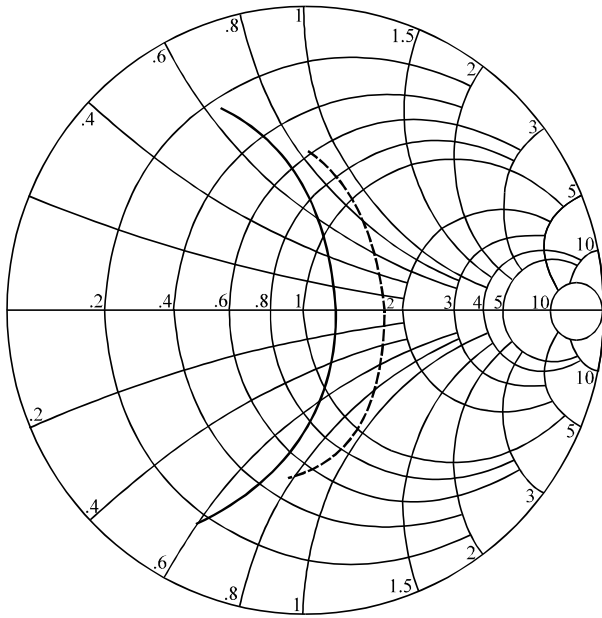


Fig. 7: Trade-off insetting feed point with input impedance (A) $y_0 = 0.0798z_0$ (solid line) (B) $y_0 = 0.0268z_0$ (Dot line)

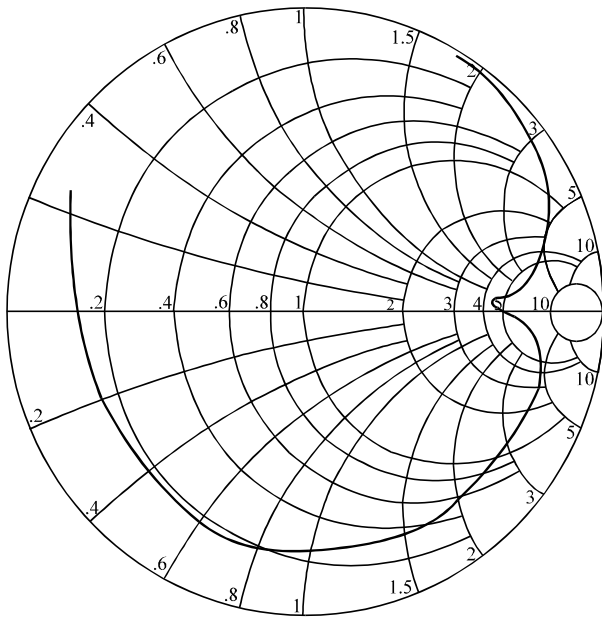


Fig. 8: The input impedance for corner fed microstrip patch

Smith chart shown in Fig. 6, show the input impedance for microstrip rectangular patch with these following parameters and BW which it calculates from equation (1) as a relative bandwidth as shown in the Table 1, which it same as appeared in Brown^[10].

Table 1: The parameters of microstrip antenna rectangular patch

Dimension		Excitation						SWR	BW
w	l	h	y_0	x_0	g_1	f_r			
0.4958 z_0	0.3308 z_0	0.00648 z_0	0	0.0138 z_0	2.2	1.57 GHz	3.6	16%	

Table 2: The parameters of microstrip antenna rectangular patch

Excitation			
	y_0	x_0	SWR
Solid line	0.0798 z_0	0.0138 z_0	2.0
Dots line	0.0268 z_0	0.0138 z_0	2.6

Table 3: The parameters of center feed microstrip antenna rectangular patch

Dimension		Excitation						SWR	BW
w	l	h	y_0	x_0	g_1	f_r			
0.2248 z_0	0.2178 z_0	0.00838 z_0	0	0	2.62	2.42 GHz	4.5	18.7%	

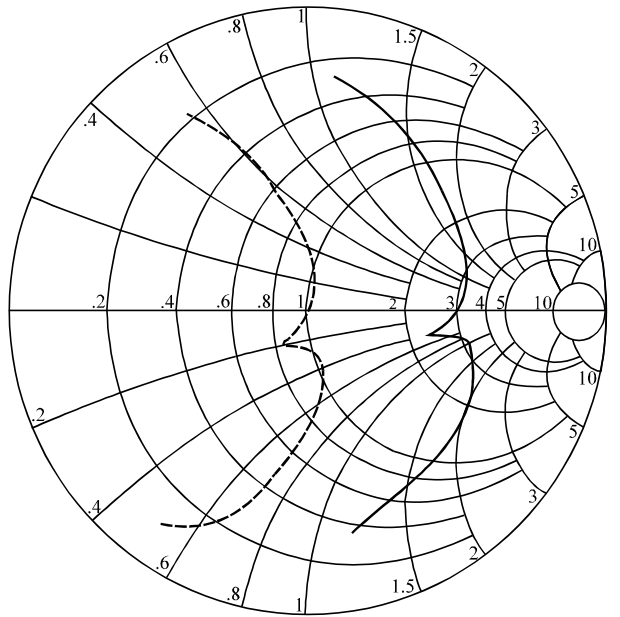


Fig. 9: The input impedance for LHCP microstrip antenna nearly square patch
(a) $x_0 = 0.118z_0, y_0 = 0.118z_0$ (dot line)
(b) $x_0 = 0.0688z_0, y_0 = 0.0688z_0$ (solid line)

Also Fig. 7 shows the input impedance with increased feed points at $y_0 = 0.0798z_0$ and $y_0 = 0.0268z_0$ has been studied. All other parameters same as in Fig. 6 and Table 2 describes these.

For a simple circular polarization for single feed microstrip antenna with an aperture coupled has been demonstrated. Properly adjusting the length of the patch and using inset feed line can easily obtain the right-hand or left-hand. Smith chart shown in Fig. 8 the input impedance for microstrip rectangular patch corner feed with these following parameters and BW, as shown in the Table 3.

As shown in Table 3 the microstrip antenna corner feed give center frequency 2.425 GHz, which it is approximately equal to unlicensed ISM WLAN IEEE802.11b or Wi-Fi band. But with narrower bandwidth than it, with carefully select dielectric constant better bandwidth can be obtained.

Figure 9 shows the variation of the feed line positions to give optimum state circular polarization for two modes (TM_{10} , TM_{10}) for equal amplitude and 90° phase differences, but with cost pay for the antenna bandwidth.

CONCLUSION

Theoretical investigations have been conducted to evaluate nearly square single polarized WLAN applications. The accuracy of the theoretical model assessed by a comparison with pervious working and the agreements were very good. Further optimization and improvement is required to ensured correct circular polarization and wider bandwidth, also more rigorous model can be used. Also antenna array^[11] can be investigated to improve the performance.

REFERENCES

1. Carver, K.R. and J.W. Wink, 1981. Microstrip antenna technology. IEEE Trans. Antennas and Propagation, AP: 29.
2. Bahl, I.J. and P. Bhartia, 1980. Microstrip Antennas Design Handbook. Artech House.
3. Garg, R. and A. Ittipiboon, 2001. Microstrip Antenna Design Handbook, Artech House.
4. Zurcher, J.F. and F. Gardiol, 1995. Broadband Patch Antenna: A Handbook. Artech House.
5. Kumar, G. and K.P. Ray, 2003. Broadband Microstrip Antenna: A Handbook. Artech House.
6. Pozar, D.M., 1996. A review of aperture coupled microstrip antennas: history, operation, development and applications. University of Massachusetts at Amherst, pp: 1-9.
7. Richards, W.F., Y.T. Lo, P. Simon and D.D. Harrison, 1979. Theory and applications for microstrip antennas, in Proc. Workshop Printed Circuit Antenna tech. New maxico state Uni. Las. Cruces, pp: 8/1-23.
8. James, J. and P.S. Hall, Eds., 1989. Handbook of Microstrip Antennas, London, UK: Peter Peregrinus, Ltd., Chap. 4.
9. Pozar and Schaubert, 1992. Microstrip antennas. Proceedings of the IEEE, Vol., 80.
10. Brown, S., 1997. Microstrip patch antennas for PCS applications. Department Electrical and Electronics Engineering, University of Auckland.
11. Mailoux, R.J. and J.F. Mcilvenna, 1981. Microstrip array technology. IEEE Trans. Antennas and Propagation, AP: 29.

射频和天线设计培训课程推荐

易迪拓培训(www.edatop.com)由数名来自于研发第一线的资深工程师发起成立,致力并专注于微波、射频、天线设计研发人才的培养;我们于 2006 年整合合并微波 EDA 网(www.mweda.com),现已发展成为国内最大的微波射频和天线设计人才培养基地,成功推出多套微波射频以及天线设计经典培训课程和 ADS、HFSS 等专业软件使用培训课程,广受客户好评;并先后与人民邮电出版社、电子工业出版社合作出版了多本专业图书,帮助数万名工程师提升了专业技术能力。客户遍布中兴通讯、研通高频、埃威航电、国人通信等多家国内知名公司,以及台湾工业技术研究院、永业科技、全一电子等多家台湾地区企业。

易迪拓培训推荐课程列表: <http://www.edatop.com/peixun/tuijian/>



射频工程师养成培训课程套装

该套装精选了射频专业基础培训课程、射频仿真设计培训课程和射频电路测量培训课程三个类别共 30 门视频培训课程和 3 本图书教材;旨在引领学员全面学习一个射频工程师需要熟悉、理解和掌握的专业知识和研发设计能力。通过套装的学习,能够让学员完全达到和胜任一个合格的射频工程师的要求...

课程网址: <http://www.edatop.com/peixun/rfe/110.html>

手机天线设计培训视频课程

该套课程全面讲授了当前手机天线相关设计技术,内容涵盖了早期的外置螺旋手机天线设计,最常用的几种手机内置天线类型——如 monopole 天线、PIFA 天线、Loop 天线和 FICA 天线的设计,以及当前高端智能手机中较常用的金属边框和全金属外壳手机天线的设计;通过该套课程的学习,可以帮助您快速、全面、系统地学习、了解和掌握各种类型的手机天线设计,以及天线及其匹配电路的设计和调试...

课程网址: <http://www.edatop.com/peixun/antenna/133.html>



WiFi 和蓝牙天线设计培训课程

该套课程是李明洋老师应邀给惠普 (HP) 公司工程师讲授的 3 天员工内训课程录像,课程内容是李明洋老师十多年工作经验积累和总结,主要讲解了 WiFi 天线设计、HFSS 天线设计软件的使用,匹配电路设计调试、矢量网络分析仪的使用操作、WiFi 射频电路和 PCB Layout 知识,以及 EMC 问题的分析解决思路等内容。对于正在从事射频设计和天线设计领域工作的您,绝对值得拥有和学习! ...

课程网址: <http://www.edatop.com/peixun/antenna/134.html>



CST 学习培训课程套装

该培训套装由易迪拓培训联合微波 EDA 网共同推出,是最全面、系统、专业的 CST 微波工作室培训课程套装,所有课程都由经验丰富的专家授课,视频教学,可以帮助您从零开始,全面系统地学习 CST 微波工作的各项功能及其在微波射频、天线设计等领域的设计应用。且购买该套装,还可超值赠送 3 个月免费学习答疑...

课程网址: <http://www.edatop.com/peixun/cst/24.html>



HFSS 学习培训课程套装

该套课程套装包含了本站全部 HFSS 培训课程,是迄今国内最全面、最专业的 HFSS 培训教程套装,可以帮助您从零开始,全面深入学习 HFSS 的各项功能和在多个方面的工程应用。购买套装,更可超值赠送 3 个月免费学习答疑,随时解答您学习过程中遇到的棘手问题,让您的 HFSS 学习更加轻松顺畅...

课程网址: <http://www.edatop.com/peixun/hfss/11.html>

ADS 学习培训课程套装

该套装是迄今国内最全面、最权威的 ADS 培训教程,共包含 10 门 ADS 学习培训课程。课程是由具有多年 ADS 使用经验的微波射频与通信系统设计领域资深专家讲解,并多结合设计实例,由浅入深、详细而又全面地讲解了 ADS 在微波射频电路设计、通信系统设计和电磁仿真设计方面的内容。能让您在最短的时间内学会使用 ADS,迅速提升个人技术能力,把 ADS 真正应用到实际研发工作中去,成为 ADS 设计专家...

课程网址: <http://www.edatop.com/peixun/ads/13.html>



我们的课程优势:

- ※ 成立于 2004 年,10 多年丰富的行业经验,
- ※ 一直致力并专注于微波射频和天线设计工程师的培养,更了解该行业对人才的要求
- ※ 经验丰富的一线资深工程师讲授,结合实际工程案例,直观、实用、易学

联系我们:

- ※ 易迪拓培训官网: <http://www.edatop.com>
- ※ 微波 EDA 网: <http://www.mweda.com>
- ※ 官方淘宝店: <http://shop36920890.taobao.com>