

Using Copper PCB Etch for Low Value Resistance

by Larry Spaziani

INTRODUCTION

Current sensing in power supplies and motor controls demand the use of a very low value resistor. Each application varies in need for resistance value, power rating, size, form factor, inductance, temperature coefficient and accuracy. To meet some of these applications, the copper of a printed circuit board (PCB) can be utilized, but has some distinct limitations. This design note provides design equations and recommendations for designing resistors with PCB copper.

DESIGN OF A COPPER PCB RESISTOR

The resistance, as a function of temperature, for a piece of metal, is given by the equation:

$$R(T) = \frac{S(T) \cdot l}{a}$$

with the units

- R = Resistance, Ω
- S(T) = Resistivity, $\Omega\text{-cm}$
- l = Length, cm
- a = Area, cm^2

The characteristics of copper which are pertinent to the design of a copper PCB resistor are [1]

Electrical Resistivity:

$$1.7241 \cdot 10^{-6} \Omega\text{-cm} @ 20^\circ\text{C}$$

Temperature Coefficient of Resistivity:

$$+0.0039 \text{ per } ^\circ\text{C}$$

Composition:

99.5% Pure Copper, typically

These constants apply to the standard commercially annealed copper used in PCB technology.

The resistivity of copper, as a function of temperature, is therefore defined as:

$$S(T) = 1.7241 \cdot 10^{-6} \cdot [1 + 0.0039 \cdot (T - 20)] \Omega\text{-cm}$$

where T is the copper temperature in $^\circ\text{C}$.

One PCB Definition which is also pertinent to resistor design is:

1oz copper is defined as 1 ounce of copper deposited over 1 square foot of surface area. This results in a copper clad PCB with a typical copper thickness of 0.0014 inches ± 0.0002 inches. 2oz copper is simply twice as thick.

Using these parameters to calculate the resistance of a given length, width, and thickness of copper PCB etch results in the formula:

$$R(T) = \frac{S(T)[\Omega\text{-cm}] \cdot \text{Length}[\text{cm}]}{\text{Width}[\text{cm}] \cdot \text{Thickness}[\text{cm}]}$$

$$= \frac{S(T)[\Omega\text{-cm}] \cdot \frac{1000\text{mils}}{2.54\text{cm}} \cdot \text{Length}(\text{mils})}{\text{Width}(\text{mils}) \cdot \text{Thickness}(\text{mils})}$$

The use of a low value sense resistor implies that the current in that resistor can be quite high. A copper etch on a PCB will self heat due to the power dissipated by the resistor. MIL-STD-275E [2] provides design guidelines relating copper etch current to temperature rise and etch dimensions. Figure 1 recreates sections of the MIL-STD-275E curves. A temperature rise, above ambient temperature, can be found by knowing the current and the area of the copper etch.

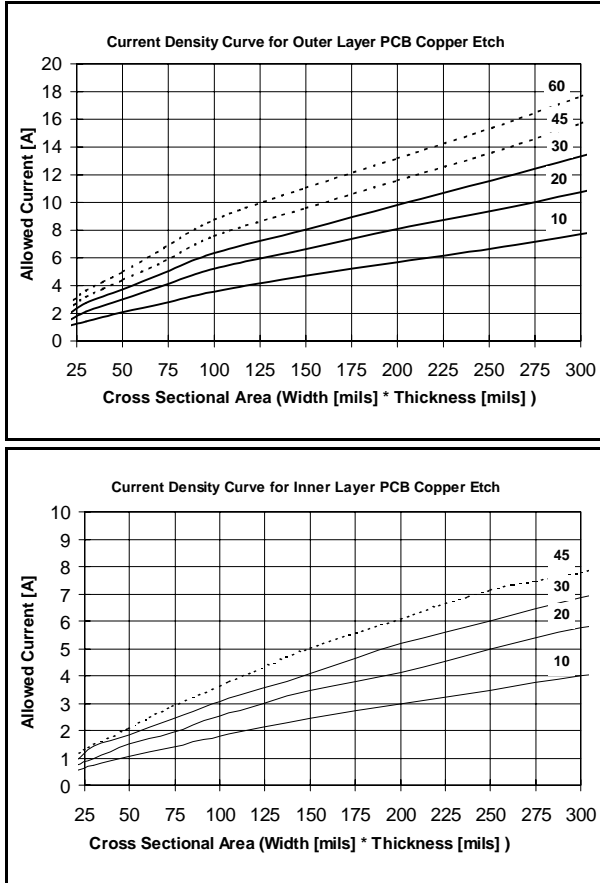


Figure 1. MIL-STD-275E Current Density vs Temperature Rise Curve for Outer and Inner Copper Layers

Example: Calculate the length and width of a 10mΩ MAXIMUM PCB resistor using 1oz on an outer layer of a PCB. The resistor must carry 10A maximum while maintaining no more than a 30°C temperature rise above ambient. Ambient temperature for normal operation is 10°C to 60°C.

Step 1:

Find the cross sectional area to carry 10A with ≤ 30°C rise, and solve for the minimum width of the resistor.

From Figure 1, 205 mils² are required to carry 10 Amperes. 1oz copper is 1.4mils thick, resulting in a minimum width for the resistor of 146mils.

Set Width = 150mils

Step 2:

Find the length of the resistor, insuring that it is designed for 10mΩ maximum at 60°C ambient +30°C rise (copper temperature is 90°C).

From the equations

$$S(90) = 1.7241 \cdot 10^{-6} \cdot [1 + 0.0039 \cdot (90 - 20)] \Omega - \text{cm}$$

and

$$R(90) = \frac{S(90) \left[\frac{\Omega - \text{cm}}{^\circ\text{C}} \right] \cdot \frac{1000\text{mils}}{2.54\text{cm}} \cdot \text{Length}[\text{mils}]}{\text{Width}[\text{mils}] \cdot \text{Thickness}[\text{mils}]}$$

Solving for R(90°C) = 10mΩ, using 150 mils for Width and 1.4 mils for Thickness results in Length = 2.43 inches.

Final Dimensions (inches): 2.43 (L) x 0.150 (W) x 0.0014 (T)

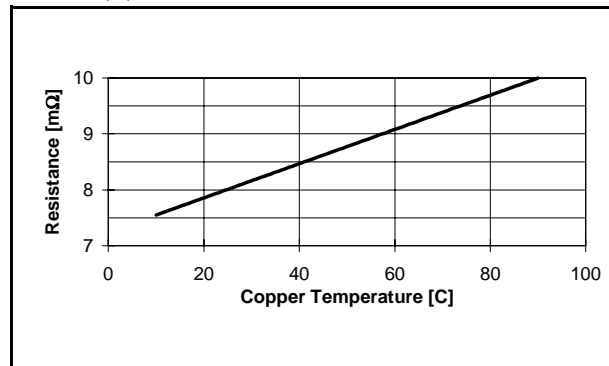


Figure 2. Resistance vs Copper Temperature for Example Design

The final resistance, as a function of the copper temperature, is shown in Figure 2.

Table 1 provides the required dimensions for a 1oz PCB copper resistor given a maximum current and desired voltage drop. Table 1 assumes a maximum operating ambient temperature of 60°C, with the width specified for a 30°C temperature rise. The required resistance is equal to V/I and is calculated at a copper temperature of 90°C.

AMPS	Desired Voltage Drop			Width [in]
	10mV	25mV	50mV	
	PCB Etch Length [in]			
1	0.162	0.405	0.810	0.010
2	0.243	0.608	1.215	0.015
3	0.405	1.013	2.025	0.025
4	0.648	1.620	3.240	0.040
5	0.891	2.228	4.456	0.055
6	1.053	2.633	5.266	0.065
7	1.377	3.443	6.886	0.085
8	1.701	4.253	8.506	0.105
9	2.025	5.063	10.126	0.125
10	2.430	6.076	12.152	0.150
11	2.754	6.886	13.772	0.170
12	3.078	7.696	15.392	0.190

Table1. Dimension Solver for Given Current and Desired Voltage Drop for 90°C Maximum Copper Temperature

Some PCB physical and layout characteristics should be considered when designing a PCB resistor.

- The thickness tolerance of PCB copper may vary from supplier to supplier and relative to location on a PCB. A typical tolerance is ± 0.2 mils/oz.
- Etchback will reduce the copper area, thus increasing the resistance per unit length. Etchback has a larger impact with narrow runs, where the width/thickness ratio is lower. It is recommended that widths of ≥ 0.025 inches be used.
- The copper resistor, if it is on an outer PCB layer, should be solder masked over the entire resistive area. Solder on the copper will reduce the resistance.

- Vias through the resistor will effect the resistance.
- Curved or serpentine resistor patterns may be utilized as long as the overall width and length, including curves, is understood.
- A copper resistor connected to two larger copper planes will have a lower temperature rise than predicted by the MIL-STD-275E curves due to the heatsinking of those copper planes.

CONCLUSIONS

The design of a PCB copper resistor is straightforward once operating parameters such as voltage drop, operating current and operating ambient temperature are known. Tolerances due to PCB technology will effect the accuracy of a PCB resistor and should be considered. The length-to-width ratio of a PCB resistor is quite large due to the low resistivity of copper, but when the area is available on a PCB, this resistor is essentially free.

Applications which require current limiting are ideal for use with a PCB resistor, as current limiting can be set quite accurately at the maximum operating temperature where current limiting is most critical. Average current mode control applications require precise voltage drops independent of temperature and current levels. PCB resistors are therefore not recommended for use as an Average Current Mode control sense resistor.

REFERENCES

- [1] Reference Data for Radio Engineers, Howard W. Sams & Co. Inc., Sixth Edition 1977.
- [2] MIL-STD-275E, NOTICE 1, 8 July 1986, Military Standard Printed Wiring for Electronic Equipment.

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, license, warranty or endorsement thereof.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations and notices. Representation or reproduction of this information with alteration voids all warranties provided for an associated TI product or service, is an unfair and deceptive business practice, and TI is not responsible nor liable for any such use.

Resale of TI's products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service, is an unfair and deceptive business practice, and TI is not responsible nor liable for any such use.

Also see: [Standard Terms and Conditions of Sale for Semiconductor Products](http://www.ti.com/sc/docs/stdterms.htm). www.ti.com/sc/docs/stdterms.htm

Mailing Address:

Texas Instruments
Post Office Box 655303
Dallas, Texas 75265

射频和天线设计培训课程推荐

易迪拓培训(www.edatop.com)由数名来自于研发第一线的资深工程师发起成立,致力并专注于微波、射频、天线设计研发人才的培养;我们于 2006 年整合合并微波 EDA 网(www.mweda.com),现已发展成为国内最大的微波射频和天线设计人才培养基地,成功推出多套微波射频以及天线设计经典培训课程和 ADS、HFSS 等专业软件使用培训课程,广受客户好评;并先后与人民邮电出版社、电子工业出版社合作出版了多本专业图书,帮助数万名工程师提升了专业技术能力。客户遍布中兴通讯、研通高频、埃威航电、国人通信等多家国内知名公司,以及台湾工业技术研究院、永业科技、全一电子等多家台湾地区企业。

易迪拓培训课程列表: <http://www.edatop.com/peixun/rfe/129.html>




射频工程师养成培训课程套装

该套装精选了射频专业基础培训课程、射频仿真设计培训课程和射频电路测量培训课程三个类别共 30 门视频培训课程和 3 本图书教材;旨在引领学员全面学习一个射频工程师需要熟悉、理解和掌握的专业知识和研发设计能力。通过套装的学习,能够让学员完全达到和胜任一个合格的射频工程师的要求...

课程网址: <http://www.edatop.com/peixun/rfe/110.html>

ADS 学习培训课程套装

该套装是迄今国内最全面、最权威的 ADS 培训教程,共包含 10 门 ADS 学习培训课程。课程是由具有多年 ADS 使用经验的微波射频与通信系统设计领域资深专家讲解,并多结合设计实例,由浅入深、详细而又全面地讲解了 ADS 在微波射频电路设计、通信系统设计和电磁仿真设计方面的内容。能让您在最短的时间内学会使用 ADS,迅速提升个人技术能力,把 ADS 真正应用到实际研发工作中去,成为 ADS 设计专家...

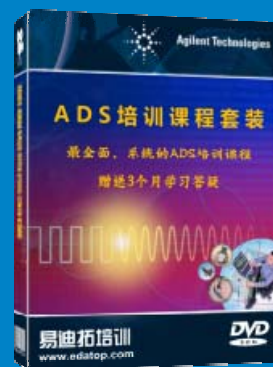

课程网址: <http://www.edatop.com/peixun/ads/13.html>



HFSS 学习培训课程套装

该套课程套装包含了本站全部 HFSS 培训课程,是迄今国内最全面、最专业的 HFSS 培训教程套装,可以帮助您从零开始,全面深入学习 HFSS 的各项功能和在多个方面的工程应用。购买套装,更可超值赠送 3 个月免费学习答疑,随时解答您学习过程中遇到的棘手问题,让您的 HFSS 学习更加轻松顺畅...

课程网址: <http://www.edatop.com/peixun/hfss/11.html>

CST 学习培训课程套装

该培训套装由易迪拓培训联合微波 EDA 网共同推出,是最全面、系统、专业的 CST 微波工作室培训课程套装,所有课程都由经验丰富的专家授课,视频教学,可以帮助您从零开始,全面系统地学习 CST 微波工作的各项功能及其在微波射频、天线设计等领域的设计应用。且购买该套装,还可超值赠送 3 个月免费学习答疑...

课程网址: <http://www.edatop.com/peixun/cst/24.html>



HFSS 天线设计培训课程套装

套装包含 6 门视频课程和 1 本图书,课程从基础讲起,内容由浅入深,理论介绍和实际操作讲解相结合,全面系统的讲解了 HFSS 天线设计的全过程。是国内最全面、最专业的 HFSS 天线设计课程,可以帮助您快速学习掌握如何使用 HFSS 设计天线,让天线设计不再难...

课程网址: <http://www.edatop.com/peixun/hfss/122.html>

13.56MHz NFC/RFID 线圈天线设计培训课程套装

套装包含 4 门视频培训课程,培训将 13.56MHz 线圈天线设计原理和仿真设计实践相结合,全面系统地讲解了 13.56MHz 线圈天线的工作原理、设计方法、设计考量以及使用 HFSS 和 CST 仿真分析线圈天线的具体操作,同时还介绍了 13.56MHz 线圈天线匹配电路的设计和调试。通过该套课程的学习,可以帮助您快速学习掌握 13.56MHz 线圈天线及其匹配电路的原理、设计和调试...

详情浏览: <http://www.edatop.com/peixun/antenna/116.html>



我们的课程优势:

- ※ 成立于 2004 年,10 多年丰富的行业经验,
- ※ 一直致力并专注于微波射频和天线设计工程师的培养,更了解该行业对人才的要求
- ※ 经验丰富的一线资深工程师讲授,结合实际工程案例,直观、实用、易学

联系我们:

- ※ 易迪拓培训官网: <http://www.edatop.com>
- ※ 微波 EDA 网: <http://www.mweda.com>
- ※ 官方淘宝店: <http://shop36920890.taobao.com>