


Features


- For CDMA, WCDMA 850 and AMPS applications
- Usable bandwidth 25 MHz (each band)
- High Tx-Rx isolation
- Low insertion loss
- High attenuation
- Single-ended operation
- No matching required for operation at 50Ω
- Ceramic Surface Mount Package (SMP)
- Hermetic
- Qualified for Automotive Applications
- Manufacturing facilities are certified with ISO/TS 16949:2002
- RoHS compliant (2002/95/EC), Pb-free

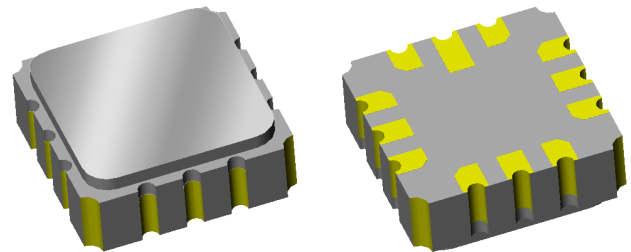

Package


Surface Mount 3.80 x 3.80 x 1.47 mm

SMP-15F

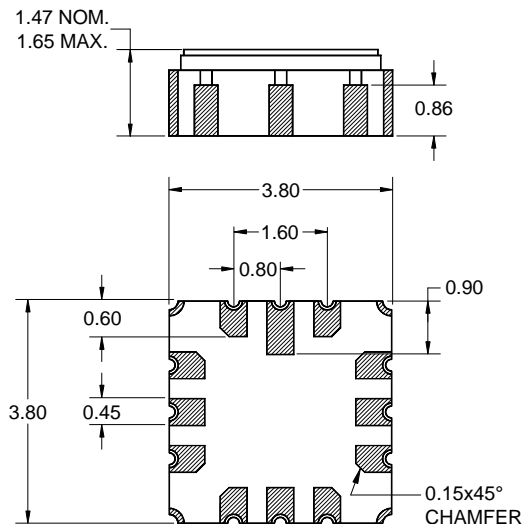

Pin Configuration

Bottom View

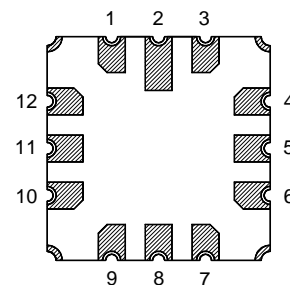

Pin No.	Description
5	Rx
8	Antenna
11	Tx
1,2,3,4,6	Case ground
7,9,10,12	Case ground

Dimensions shown are nominal in millimeters
All tolerances are ± 0.15 mm except overall
length and width ± 0.10 mm

Body: Al_2O_3 ceramic

Lid: Kovar, Ni plated

Terminations: Au plating 0.5 - 1.0 μ m,
over a 2 - 6 μ m Ni plating

Electrical Specifications ⁽¹⁾

Operating Temperature: ⁽²⁾ +25 °C

Parameter ⁽³⁾	Minimum	Typical	Maximum	Unit
Tx-Ant Specification				
Center Frequency	-	836.5	-	MHz
Maximum Insertion Loss ⁽⁴⁾ 824 - 849 MHz	-	1.9	2.3	dB
Amplitude Ripple 824 - 849 MHz	-	0.5	0.7	dB
Absolute Attenuation 10 - 750 MHz	24	30	-	dB
869 - 894 MHz	45	50	-	dB
1050 - 1100 MHz	20	24	-	dB
1250 - 1325 MHz	14	18	-	dB
Second Harmonic Attenuation 1648 - 1698 MHz	7	10	-	dB
Third Harmonic Attenuation 2472 - 2547 MHz	8	12	-	dB
Return Loss at Tx Terminal ⁽⁴⁾ 824 - 849 MHz	10	13	-	dB
Ant-Rx Specification				
Center Frequency	-	881.5	-	MHz
Maximum Insertion Loss ⁽⁴⁾ 869 - 894 MHz	-	2.3	3.0	dB
Amplitude Ripple 869 - 894 MHz	-	0.6	1.2	dB
869 - 894 MHz (over any 5MHz span)	-	0.4	0.8	dB
Absolute Attenuation 10 - 779 MHz	25	32	-	dB
779 - 804 MHz	34	38	-	dB
824 - 849 MHz	52	56	-	dB
1039 - 1065 MHz	30	38	-	dB
1100 - 1270 MHz	36	42	-	dB
1648 - 1698 MHz	35	42	-	dB
2472 - 2547 MHz	20	27	-	dB
3000 - 6000 MHz	7	10	-	dB
Return Loss at Rx Terminal ⁽⁴⁾ 869 - 894 MHz	9	12	-	dB
Tx-Rx Specification				
Tx to Rx Isolation 824 - 849 MHz	55	60	-	dB
869 - 894 MHz	45	50	-	dB

Notes:

1. All specifications are based on the test circuit shown on page 6
2. This specification is valid for room temperature only. The specification over the full temperature range(s) is available on the next page(s)
3. Electrical margin has been built into the design to account for the variations due to manufacturing tolerances
4. Excluding losses due to PCB

Electrical Specifications ⁽¹⁾

Operating Temperature Range: ⁽²⁾ -30 to +85 °C

Parameter ⁽³⁾	Minimum	Typical	Maximum	Unit
Tx-Ant Specification				
Center Frequency	-	836.5	-	MHz
Maximum Insertion Loss ⁽⁴⁾ 824 - 849 MHz	-	1.9	2.3	dB
Amplitude Ripple 824 - 849 MHz	-	0.6	1	dB
Absolute Attenuation 10 - 750 MHz	24	30	-	dB
869 - 894 MHz	45	50	-	dB
1050 - 1100 MHz	20	24	-	dB
1250 - 1325 MHz	14	18	-	dB
Second Harmonic Attenuation 1648 - 1698 MHz	7	10	-	dB
Third Harmonic Attenuation 2472 - 2547 MHz	8	12	-	dB
Return Loss at Tx Terminal ⁽⁴⁾ 824 - 849 MHz	10	12	-	dB
Ant-Rx Specification				
Center Frequency	-	881.5	-	MHz
Maximum Insertion Loss ⁽⁴⁾ 869 - 894 MHz	-	2.6	3.2	dB
Amplitude Ripple 869 - 894 MHz	-	0.9	1.4	dB
869 - 894 MHz (over any 5MHz span)	-	0.4	0.8	dB
Absolute Attenuation 10 - 779 MHz	25	32	-	dB
779 - 804 MHz	34	38	-	dB
824 - 849 MHz	50	56	-	dB
1039 - 1065 MHz	30	38	-	dB
1100 - 1270 MHz	36	42	-	dB
1648 - 1698 MHz	35	42	-	dB
2472 - 2547 MHz	20	27	-	dB
3000 - 6000 MHz	7	10	-	dB
Return Loss at Rx Terminal ⁽⁴⁾ 869 - 894 MHz	9	12	-	dB
Tx-Rx Specification				
Tx to Rx Isolation 824 - 849 MHz	54	60	-	dB
869 - 894 MHz	45	49	-	dB

Notes:

1. All specifications are based on the test circuit shown on page 6
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. Excluding losses due to PCB

Electrical Specifications ⁽¹⁾







Operating Temperature Range: ⁽²⁾ -40 to +85 °C

Parameter ⁽³⁾	Minimum	Typical	Maximum	Unit
Tx-Ant Specification				
Center Frequency	-	836.5	-	MHz
Maximum Insertion Loss ⁽⁴⁾ 824 - 849 MHz	-	1.9	2.5	dB
Absolute Attenuation DC - 800 MHz	12	30	-	dB
869 - 894 MHz	42	50	-	dB
1715 - 1785 MHz	7	10	-	dB
Second Harmonic Attenuation 1648 - 1698 MHz	7	10	-	dB
Third Harmonic Attenuation 2472 - 2547 MHz	8	12	-	dB
Return Loss at Tx Terminal ⁽⁴⁾ 824 - 849 MHz	10	12	-	dB
Ant-Rx Specification				
Center Frequency	-	881.5	-	MHz
Maximum Insertion Loss ⁽⁴⁾ 869 - 894 MHz	-	2.6	3.6	dB
Absolute Attenuation DC - 800 MHz	25	32	-	dB
824 - 849 MHz	50	56	-	dB
1738 - 1788 MHz	25	30	-	dB
2604 - 2682 MHz	15	22	-	dB
Return Loss at Rx Terminal ⁽⁴⁾ 869 - 894 MHz	9	12	-	dB
Tx-Rx Specification				
Tx to Rx Isolation 824 - 849 MHz	54	60	-	dB
869 - 894 MHz	44	49	-	dB

Notes:

1. All specifications are based on the test circuit shown on page 6
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. Excluding losses due to PCB


Typical Performance

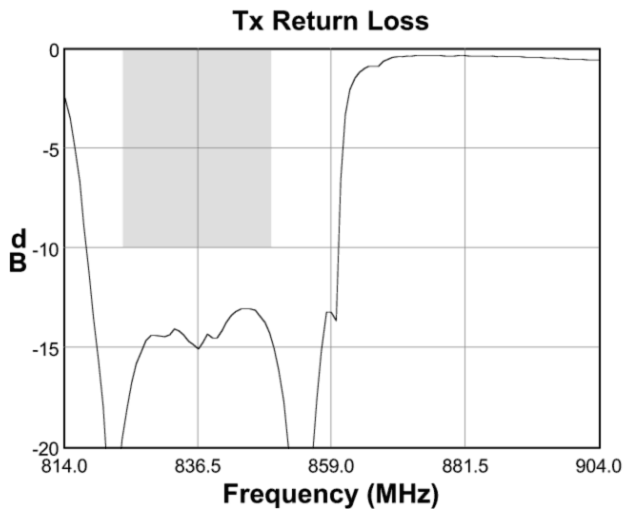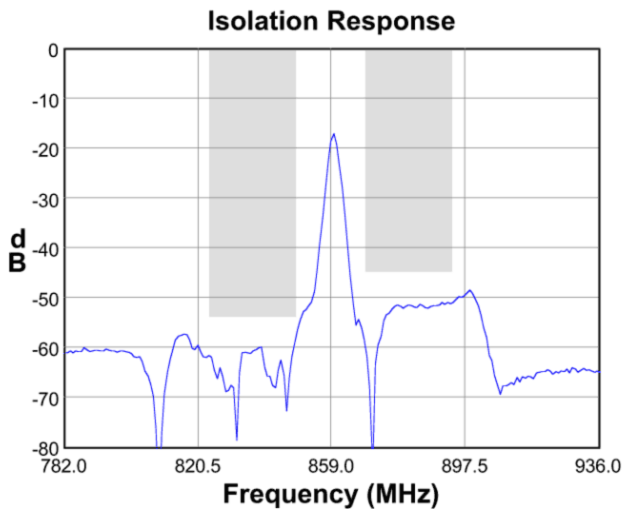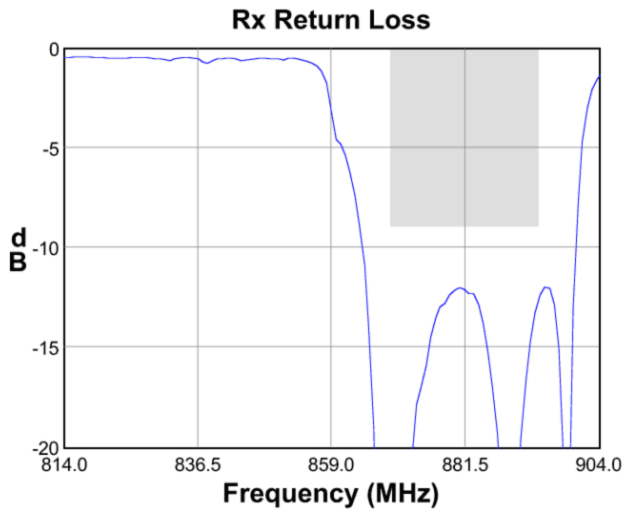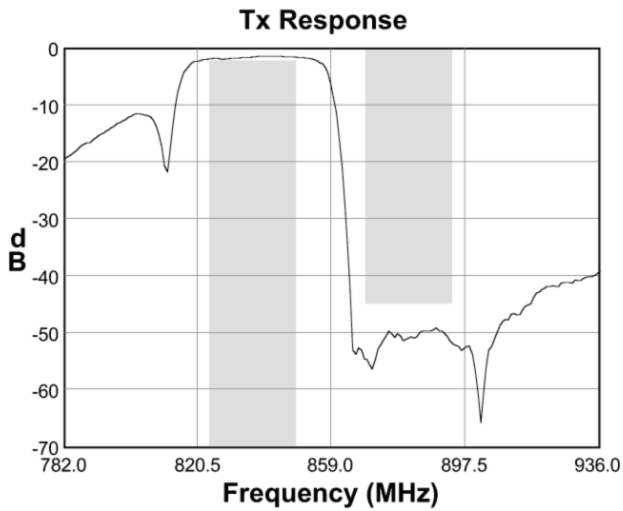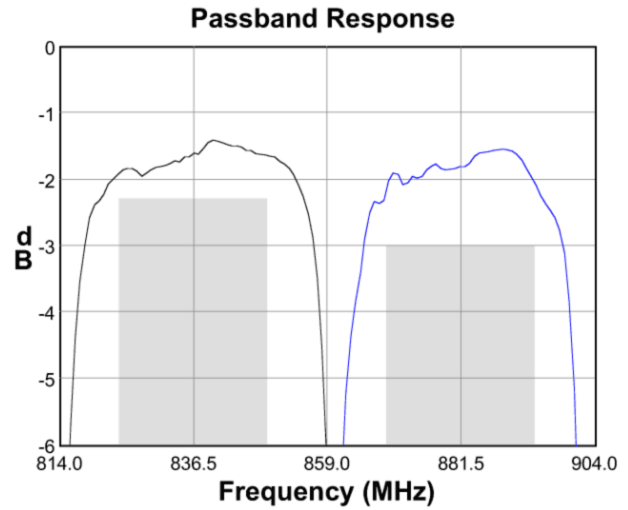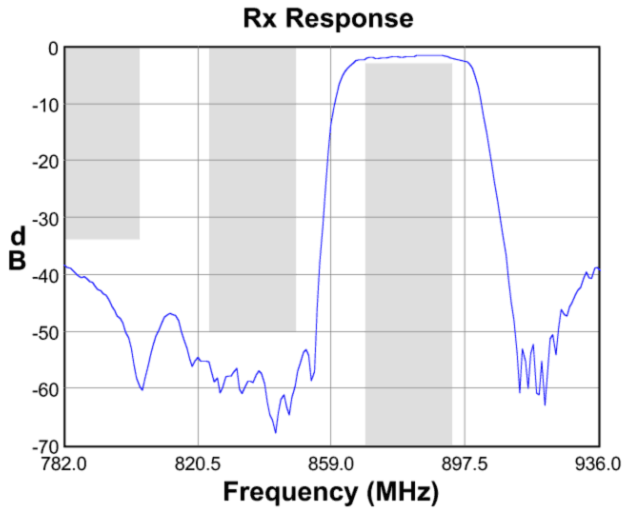


Matching Schematics

Actual matching values may vary due to PCB layout and parasitics


50 Ω
Single-ended
Input

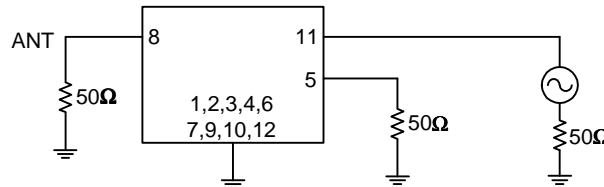

50 Ω
Single-ended
Input

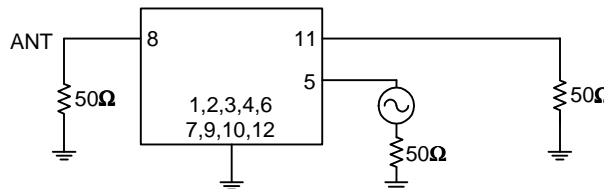


Marking

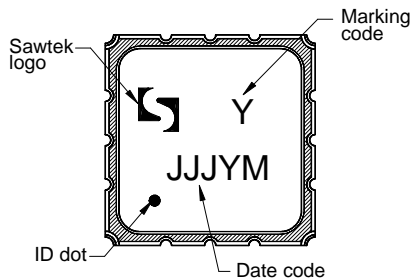



The date code consists of: JJJ = Julian day,
Y = last digit of year, M = manufacturing site code

PCB Footprint

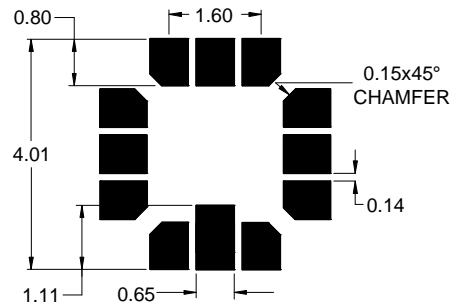

This footprint represents a recommendation only
Dimensions shown are nominal in millimeters

Tape and Reel

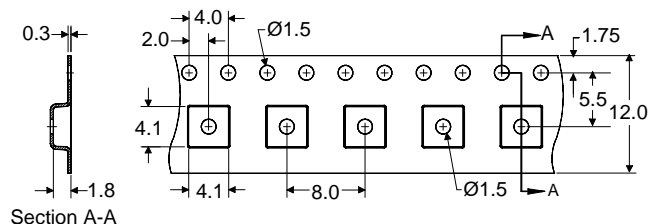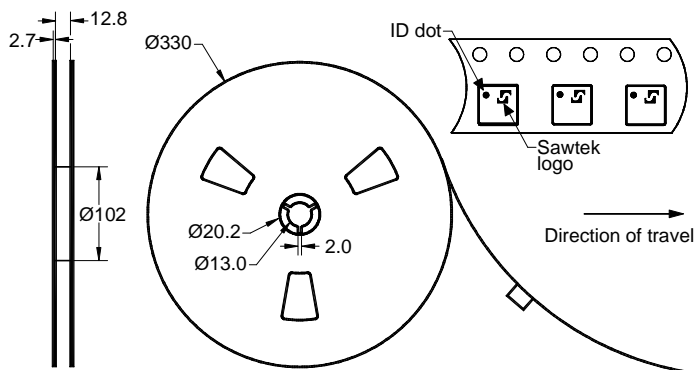


Dimensions shown are nominal in millimeters
Packaging quantity: 4000 units/reel

Maximum Ratings


Parameter	Symbol	Minimum	Maximum	Unit
Operating Temperature Range	T	-30	+85	°C
Storage Temperature Range	T _{stg}	-40	+85	°C
RF Power	P _{in}	-	+31	dBm

Important Notes

Warnings

- Electrostatic Sensitive Device (ESD) 
- Avoid ultrasonic exposure

RoHS Compliance

- This product complies with EU directive 2002/95/EC (RoHS) 

Solderability

Compatible with JEDEC J-STD-020C **Pb-free** process, **260°C** peak reflow temperature ([see soldering profile](#))

Links to Additional Technical Information

[PCB Layout Tips](#)

[Qualification Flowchart](#)

[Soldering Profile](#)

[S-Parameters](#)

[Other Technical Information](#)

TriQuint's liability is limited only to the Surface Acoustic Wave (SAW) component(s) described in this data sheet. TriQuint does not accept any liability for applications, processes, circuits or assemblies, which are implemented using any TriQuint component described in this data sheet.

Contact Information

TriQuint 
SEMICONDUCTOR
PO Box 609501
Orlando, FL 32860-9501
USA

Phone: +1 (407) 886-8860
Fax: +1 (407) 886-7061
Email: info-product@tqs.com
Web: www.triquint.com

Or contact one of our worldwide
Network of [sales offices](#),
[Representatives or distributors](#)

射频和天线设计培训课程推荐

易迪拓培训(www.edatop.com)由数名来自于研发第一线的资深工程师发起成立,致力并专注于微波、射频、天线设计研发人才的培养;我们于 2006 年整合合并微波 EDA 网(www.mweda.com),现已发展成为国内最大的微波射频和天线设计人才培养基地,成功推出多套微波射频以及天线设计经典培训课程和 ADS、HFSS 等专业软件使用培训课程,广受客户好评;并先后与人民邮电出版社、电子工业出版社合作出版了多本专业图书,帮助数万名工程师提升了专业技术能力。客户遍布中兴通讯、研通高频、埃威航电、国人通信等多家国内知名公司,以及台湾工业技术研究院、永业科技、全一电子等多家台湾地区企业。

易迪拓培训课程列表: <http://www.edatop.com/peixun/rfe/129.html>



射频工程师养成培训课程套装

该套装精选了射频专业基础培训课程、射频仿真设计培训课程和射频电路测量培训课程三个类别共 30 门视频培训课程和 3 本图书教材;旨在引领学员全面学习一个射频工程师需要熟悉、理解和掌握的专业知识和研发设计能力。通过套装的学习,能够让学员完全达到和胜任一个合格的射频工程师的要求...

课程网址: <http://www.edatop.com/peixun/rfe/110.html>

ADS 学习培训课程套装

该套装是迄今国内最全面、最权威的 ADS 培训教程,共包含 10 门 ADS 学习培训课程。课程是由具有多年 ADS 使用经验的微波射频与通信系统设计领域资深专家讲解,并多结合设计实例,由浅入深、详细而又全面地讲解了 ADS 在微波射频电路设计、通信系统设计和电磁仿真设计方面的内容。能让您在最短的时间内学会使用 ADS,迅速提升个人技术能力,把 ADS 真正应用到实际研发工作中去,成为 ADS 设计专家...



课程网址: <http://www.edatop.com/peixun/ads/13.html>



HFSS 学习培训课程套装

该套课程套装包含了本站全部 HFSS 培训课程,是迄今国内最全面、最专业的 HFSS 培训教程套装,可以帮助您从零开始,全面深入学习 HFSS 的各项功能和在多个方面的工程应用。购买套装,更可超值赠送 3 个月免费学习答疑,随时解答您学习过程中遇到的棘手问题,让您的 HFSS 学习更加轻松顺畅...

课程网址: <http://www.edatop.com/peixun/hfss/11.html>

CST 学习培训课程套装

该培训套装由易迪拓培训联合微波 EDA 网共同推出,是最全面、系统、专业的 CST 微波工作室培训课程套装,所有课程都由经验丰富的专家授课,视频教学,可以帮助您从零开始,全面系统地学习 CST 微波工作的各项功能及其在微波射频、天线设计等领域的设计应用。且购买该套装,还可超值赠送 3 个月免费学习答疑...

课程网址: <http://www.edatop.com/peixun/cst/24.html>



HFSS 天线设计培训课程套装

套装包含 6 门视频课程和 1 本图书,课程从基础讲起,内容由浅入深,理论介绍和实际操作讲解相结合,全面系统的讲解了 HFSS 天线设计的全过程。是国内最全面、最专业的 HFSS 天线设计课程,可以帮助您快速学习掌握如何使用 HFSS 设计天线,让天线设计不再难...

课程网址: <http://www.edatop.com/peixun/hfss/122.html>

13.56MHz NFC/RFID 线圈天线设计培训课程套装

套装包含 4 门视频培训课程,培训将 13.56MHz 线圈天线设计原理和仿真设计实践相结合,全面系统地讲解了 13.56MHz 线圈天线的工作原理、设计方法、设计考量以及使用 HFSS 和 CST 仿真分析线圈天线的具体操作,同时还介绍了 13.56MHz 线圈天线匹配电路的设计和调试。通过该套课程的学习,可以帮助您快速学习掌握 13.56MHz 线圈天线及其匹配电路的原理、设计和调试...

详情浏览: <http://www.edatop.com/peixun/antenna/116.html>



我们的课程优势:

- ※ 成立于 2004 年,10 多年丰富的行业经验,
- ※ 一直致力并专注于微波射频和天线设计工程师的培养,更了解该行业对人才的要求
- ※ 经验丰富的一线资深工程师讲授,结合实际工程案例,直观、实用、易学

联系我们:

- ※ 易迪拓培训官网: <http://www.edatop.com>
- ※ 微波 EDA 网: <http://www.mweda.com>
- ※ 官方淘宝店: <http://shop36920890.taobao.com>