

Small Fractal Antennas

Kirk T. McDonald

Joseph Henry Laboratories, Princeton University, Princeton, NJ 08544

(December 22, 2003)

1 Problem

Antennas for hand-held communication devices are necessarily small, and typically use wavelengths λ that are large compared to the size of the antenna. This typically implies that the magnitude of the antenna reactance X (= imaginary part of the antenna impedance) is large compared to that of its radiation resistance R_{rad} (which is related to the time-average radiated power P and the peak current I_0 at the feedpoint by $P = I_0^2 R_{\text{rad}}/2$), so that it is challenging to build an effective impedance matching circuit between the feedline and the antenna. Furthermore, small antennas use small conductors so it may be that the Ohmic resistance R_{Ohm} of the antenna is significant compared to radiation resistance,¹ which lowers the antenna efficiency, defined as

$$\text{Antenna Efficiency} = \frac{R_{\text{rad}}}{R_{\text{rad}} + R_{\text{Ohm}}} . \quad (1)$$

It is possible to lower the reactance of an antenna by changing the shape of its conductors without increasing the overall size of the antenna. If the length and complexity of the shape of the antenna conductors is increased while keeping the overall area of the antenna constant, we create what is sometimes called a **fractal antenna**. Details of the antenna reactance of fractal antennas are best calculated with a numerical code such as NEC4. Here you are asked to use relatively simple analytic arguments to discuss the radiation (and Ohmic) resistance of a planar fractal antenna that fits within a square of edge length $a \ll \lambda$

Show that the radiation resistance of a fractal loop antenna is smaller than that of a simple loop antenna of the same extent a . Show that the radiation resistance of a dipole antenna based on a dense (Hilbert) fractal pattern is essentially identical to that of a simple linear dipole antenna of the same total height $a \ll \lambda$, even if the total length L of the conductor is of order λ .

Then, since the Ohmic resistance of a fractal antenna is necessarily larger than that of a simple dipole or loop antenna of the same overall extent, the efficiency (1) of a fractal antenna is lower than that of the simpler antenna. Nonetheless, in some cases the lower reactance of the fractal antenna may provide a useful advantage in simplifying the feed electronics of the antenna system.

2 Solution

We first discuss small fractal antennas as receiving antennas. This discussion will be somewhat qualitative, so we follow it with more quantitative discussion of their behavior as

¹The antenna impedance is $Z = R_{\text{rad}} + R_{\text{Ohm}} + iX$, where $i = \sqrt{-1}$.

broadcast antennas. The antenna reciprocity theorem [1] guarantees that a good broadcast antenna is also a good receiving antenna.

2.1 Remarks about Receiving Antennas

A receiving antenna can be considered as a 2-terminal device whose purpose is to produce a voltage (that can be amplified externally, and demodulated to produce an audio signal, *etc.*) in response to an electromagnetic wave. If the conductor of an antenna fits within a square of edge a that is small compared to the wavelength λ of the electromagnetic wave that is to be detected, then the electric and magnetic fields \mathbf{E} and \mathbf{B} have negligible spatial variation over the antenna at any moment in time.

If the receiving antenna is a dipole, then it responds primarily to the electric field of the wave. Clearly, the largest voltage drop across the antenna, is just the field strength E times the largest spatial dimension of the antenna. That is

$$V_{\max} = \sqrt{2}aE \quad (\text{small dipole antenna}), \quad (2)$$

independent of the detailed arrangement of the conductor within the square of edge a .² We immediately infer that a small fractal dipole antenna cannot be superior to an ordinary small dipole antenna if their overall spatial extents are the same.

In practice, the signal from a small dipole antenna is more like 1/2 of the maximal voltage (2). This is because a signal in a dipole antenna is based on the induced electric dipole moment $p = qd$, which depends on the distance d between the centers of each arm of the antenna, which is typically half the distance between the tips.

A loop antenna responds primarily to the magnetic field of the broadcast wave, via Faraday's law. That is, the 2-terminal signal voltage is proportional to time rate of change of the magnetic flux through the antenna, which is proportional to the area of the antenna,

$$V \propto \frac{d\Phi}{dt} \propto \omega B \text{Area} \quad (\text{small loop antenna}), \quad (3)$$

where $\omega = 2\pi f$ is the angular frequency of the (carrier) wave.³ Thus, if a loop antenna fits within a square of edge a , the signal will be strongest if the shape is simply a square of edge a . A fractal shape for the conductor reduces the area of the antenna (provided it still fits within a square of edge a), and hence reduces its effectiveness as a small loop antenna.

The power extracted from the incident wave by an antenna depends on the effective impedance Z of the combination of the antenna plus receiving circuit, according to $P = \text{Re}(V^2/2Z)$. If the total impedance of a small antenna + receiving circuit can be made small, the small antenna can extract just as much power from the incident wave as the large antenna. Hence, understand of antenna reactance is important for receiving as well as broadcast antennas. This note, however, limits its further discussion to the real part of the antenna impedance.

We now turn to a discussion of small antennas as broadcast devices.

²The maximal signal voltage can be achieved only with proper alignment of the antenna with respect to the electric field of the wave; *i.e.*, the arms of the dipole should be parallel to the electric field vector \mathbf{E} .

³The maximal signal voltage in a loop antenna is achieved when the axis of the loop is parallel to the magnetic field \mathbf{B} of the wave.

2.2 Radiation Resistance of Small Linear and Loop Antennas

A simple measure of the performance of a broadcast antenna is its radiation resistance R_{rad} , which relates the (time-averaged) radiation power P to the peak current I_0 that drives the antenna, according to

$$P = \frac{1}{2} I_0^2 R_{\text{rad}}. \quad (4)$$

A higher radiation resistance is better, in that more power is radiated compared to the power $I_0^2 R_{\text{Ohm}}/2$ lost to heating the antenna due to the ordinary resistance R_{Ohm} of its conductor.

2.2.1 Small Center-Fed Linear Dipole Antenna

Recall that the radiation resistance of a center-fed, linear dipole antenna of length $a \ll \lambda$ is

$$R_{\text{rad}} = \left(\frac{a}{\lambda}\right)^2 197 \, \Omega, \quad (\text{center-fed linear dipole}), \quad (5)$$

assuming that the current drops linear between the center of the antenna (the feed point) and the tips (where the current must be zero)[2]. The radiation resistance of a small linear dipole antenna of length a falls off as $(a/\lambda)^2$.

2.2.2 Small Loop Antenna

Likewise, the radiation resistance of a small loop antenna of area A is [3]

$$R_{\text{rad}} = \left(\frac{A}{\lambda^2}\right)^2 31,170 \, \Omega, \quad (\text{loop}), \quad (6)$$

independent of the shape of the loop provided its longest diameter (or diagonal) is small compared to λ . The radiation resistance of a small, square, loop antenna of edge a falls off as $(a/\lambda)^4$. For $a \lesssim \lambda/12$, a loop antenna has lower radiation resistance than that of a linear dipole antenna.

2.3 Small Fractal Antennas

Turning now to the question of the merits of a fractal antenna whose largest dimension a is still small compared to the wavelength λ , we note that this condition implies that phase differences are negligible between the radiation from different parts of the antenna. In this case, it suffices to analyze the radiation in the dipole approximation. That is, all details of the radiation pattern follow from knowledge of the electric and magnetic dipole moments of the charge and current distributions in the antenna.

2.3.1 Small Fractal Antennas with Conductor Length $\ll \lambda$

If the total length of the conductor in the antenna is also small compared to λ , an additional simplification holds. For a loop antenna, the (instantaneous) current I is uniform throughout the antenna, so the magnetic moment is simply IA , and eq. (6) still holds for the radiation resistance of the loop antenna.

The area of a fractal loop antenna is less than that of the geometric figure on which the fractal loop is based, as shown in Fig. 1. Therefore, the radiation resistance of a fractal loop antenna is lower than that of the corresponding simple loop antenna.

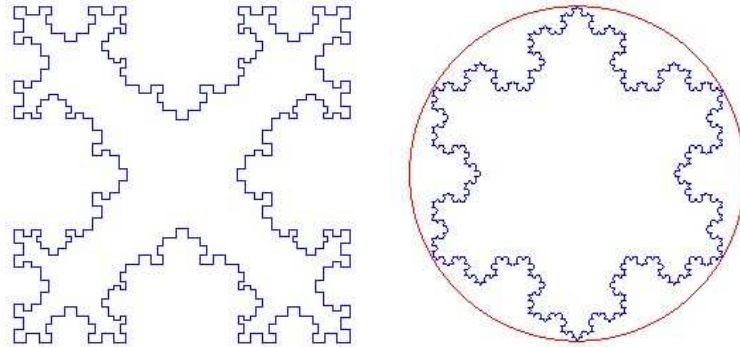


Figure 1: Two examples of the pattern of the conductor in fractal loop antennas.

In a center-fed dipole antenna whose conductor has total length L that is small compared to λ , the current distribution falls off linearly with distance l along the conductor from the central feed points to the tips (at $l = \pm L/2$) of the antenna. That is,

$$I(l, t) = I_0 \left(1 - \frac{2|l|}{L} \right) e^{-i\omega t}, \quad (7)$$

taking distance l (which is measured along the conductor, from the central feed point) to be positive on one arm of the antenna and negative along the other.

The equation of continuity for charges and currents (charge conservation) can be written in general as $\nabla \cdot \mathbf{J} = -\partial\rho/\partial t$, where \mathbf{J} is the current density and ρ is the charge density. For the case of a dipole antenna made from a pair of wires, the equation of continuity becomes⁴

$$\rho(l, t) = \frac{i}{\omega} \frac{\partial\rho}{\partial t} = -\frac{i}{\omega} \frac{\partial I}{\partial l} = \pm \frac{2iI_0}{\omega L} e^{-i\omega t}. \quad (8)$$

The instantaneous current distribution is uniform in each arm of the antenna, but with opposite signs in the two arms. The total charge Q_{\pm} on each of the arms is

$$Q_{\pm}(t) = \pm \frac{iI_0}{\omega} e^{-i\omega t}, \quad (9)$$

which is independent of the length L of the conductor.

We take the plane of the fractal dipole antenna to be the x - y plane, with the feed point at the origin. The pattern of the conductor is symmetric about the x axis. Hence, the

⁴Equation (8) holds only if the radius of curvature of the “kinks” in the fractal pattern is larger than the diameter of the conductor. This condition will always be met in any practical application of the fractal antenna concept.

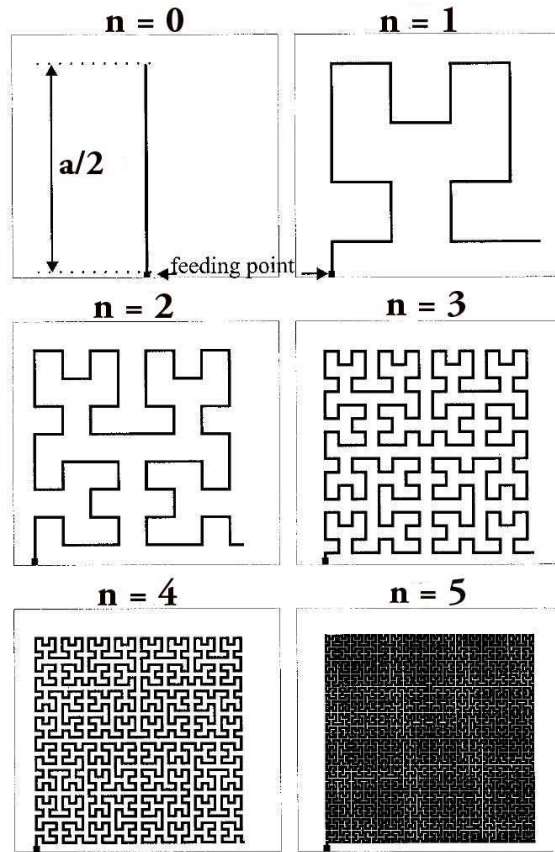


Figure 2: The pattern of one arm of a Hilbert fractal dipole antenna. From [4]. For the calculations in the text, the origin is taken at the feed point, the x axis is horizontal and the y axis is vertical. The patterns of fractal dipole antennas are obtained by reflecting the patterns in the figure about the x axis.

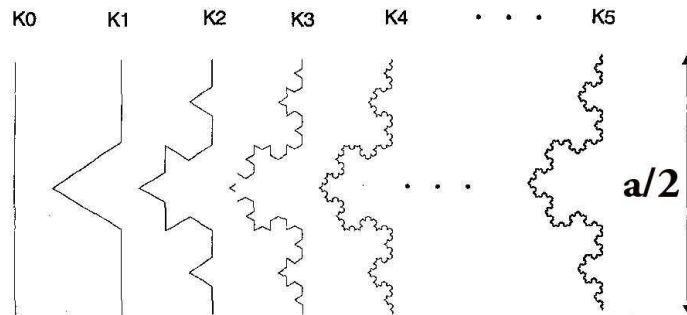


Figure 3: The pattern of one arm of a Koch fractal dipole antenna. From [5].

antisymmetry of the charge distribution (8) implies that the x component of the electric dipole moment vanishes. For a fractal dipole antenna pattern such as the Hilbert pattern shown in Fig. 2, for which the conductor is in effect uniformly distributed along the y axis and whose total extent along the y axis is a , the y component of the electric dipole moment is

$$p_y(t) = \sum_i Q_i y_i = Q_+ \left(\frac{a}{4}\right) + Q_- \left(-\frac{a}{4}\right) = \frac{iI_0 a}{2\omega} e^{-i\omega t}, \quad (10)$$

which is identical to the result for a short linear dipole antenna of length $a \ll \lambda$ [2]. The time-averaged radiated power P is therefore (in Gaussian units)

$$P = \frac{|\ddot{p}_y|^2}{3c^3} = \frac{I_0^2 a^2 \omega^2}{12c^2} = \frac{I_0^2 2\pi^2 a^2}{2 3c \lambda^2} \equiv \frac{I_0^2}{2} R_{\text{rad}}. \quad (11)$$

Noting that $1/c = 30 \Omega$, the radiation resistance of a small fractal dipole antenna of total length $L \ll \lambda$ is

$$R_{\text{rad}} = \left(\frac{a}{\lambda}\right)^2 197 \Omega, \quad (\text{fractal center-fed dipole, } L \ll \lambda), \quad (12)$$

which is identical to that of a small linear dipole antenna, as given by eq. (5).

For a dipole antenna based on the Koch fractal, shown in Fig. 3), we see that the distribution of segments is not uniform along the y axis. However, the fractal pattern in each arm is symmetric about the midheight of each arm, so the dipole moment of each arm is still the total charge on the arm times the height of the midpoint of the arm, as in eq. (10). Hence, the result (12) holds for the radiation resistance of a Koch dipole antenna as well.

In sum, we have found that the radiation resistance, and hence also the antenna efficiency (1), of small fractal dipole and loop antennas is not better than that of simple dipole and loop antennas of the same overall extent, provided the total length L of the conductor is also small compared to the wavelength λ .

2.3.2 Small Fractal Dipole Antennas with Conductor Length $\approx \lambda$

Since the area of a fractal loop antenna of extent a is little changed from the area of a simple loop of extent a , the radiation resistance of the fractal loop antenna is little different (although always smaller) than that of the simple loop antenna, even when the conductor length L of the fractal antenna becomes large compared to a . Hence, we do not pursue this case further.

To analyze a fractal dipole antenna whose conductor has total length $L \lesssim \lambda$, we need a model of the current distribution $I(l, t)$. The current distribution will be symmetric about $l = 0$, and will vanish at the tips of the antenna: $I(\pm L/2, t) = 0$. Noting these constraints, we can make a Fourier analysis of the current distribution based on the functions $\sin[nkL/2(1 - 2|l|/L)]$, $n = 1, 2, 3, \dots$, where $k = \omega/c = 2\pi/\lambda$. Thus,

$$I(l, t) = I_0 \frac{\sum_n A_n \sin\left[\frac{nkL}{2}\left(1 - \frac{2|l|}{L}\right)\right]}{\sum_n A_n \sin\left(\frac{nkL}{2}\right)} e^{-i\omega t}, \quad (13)$$

where I_0 is the current at the feed point if $L \leq \lambda/2$. (For $L > \lambda/2$ the peak current does not occur at the feed point.) The case $kL = \pi$ ($L = \lambda/2$) could be called a fractal half-wave antenna. If the fractal segments of the antenna have length L/n , Fourier coefficients with $n \lesssim N$ may be important. When modeling a linear dipole antenna, the usual approximation [2] is to take $A_1 = 1$ and set all other Fourier coefficients to zero.

We do not have a simple method to evaluate the Fourier coefficients A_n , but it turns out that we will not need to know these coefficients if the antenna has a dense fractal pattern!

Because the extent a of the fractal antenna is still small compared to λ , we can continue to calculate in the dipole approximation. For this we need the charge distribution corresponding to eq. (13), which we obtain following the logic of eq. (8),

$$\rho(l, t) = -\frac{i}{\omega} \frac{\partial I}{\partial l} = \pm \frac{iI_0}{c} \frac{\sum_n n A_n \cos\left[\frac{nkL}{2} \left(1 - \frac{2|l|}{L}\right)\right]}{\sum_n A_n \sin\left(\frac{nkL}{2}\right)} e^{-i\omega t}. \quad (14)$$

We need the electric dipole moment of this charge distribution. Again $p_x = 0$, while

$$\begin{aligned} p_y(t) &= \frac{iI_0}{c \sum_n A_n \sin\left(\frac{nkL}{2}\right)} e^{-i\omega t} \int_{-a/2}^{a/2} \pm y dy \sum_n n A_n \cos\left[\frac{nkL}{2} \left(1 - \frac{2|l(y)|}{L}\right)\right] \\ &= \frac{2iI_0}{c \sum_n A_n \sin\left(\frac{nkL}{2}\right)} e^{-i\omega t} \int_0^{a/2} y dy \sum_n n A_n \cos\left(\frac{nkL}{2} - nkl(y)\right). \end{aligned} \quad (15)$$

For a high-order Hilbert fractal pattern, the function $l(y)$ for $y > 0$ takes on essentially all values between 0 and $L/2$ with equal probability. Hence, we can approximate $\cos(nkL/2 - nkl)$ by its average on the interval $[0, L/2]$, *i.e.*, by

$$\frac{2}{L} \int_0^{L/2} dl \cos(nkL/2 - nkl) = \frac{\sin(nkL/2)}{nkL/2}. \quad (16)$$

We must also note that the function $l(y)$ is multiple valued in the case of a Hilbert fractal pattern; at each height y , there are L/a segments of the fractal. Hence, in eq. (15) we replace $\cos(nkL/2 - nkl)$ by L/a times the average value (16), *i.e.*, by $\sin(nkL/2)/(nka/2)$. The Fourier series in the numerator and denominator of eq. (15) are now identical, so we obtain

$$p_y(t) \approx \frac{iI_0 a}{2\omega} e^{-i\omega t} \quad (\text{Hilbert fractal dipole, } L \approx \lambda). \quad (17)$$

This is a remarkable result. Use of a dense (Hilbert) fractal pattern of total length $L \approx \lambda$ for the dipole antenna leads to a radiation resistance that is essentially identical to that of a simple linear dipole antenna of the same total height a , assuming that the antenna is small ($a \ll \lambda$).

This conclusion is based on the assumption of a Hilbert fractal pattern (Fig. 2), which permitted the approximation (16). In the case of a Koch fractal pattern (Fig. 3), this approximation does not hold, so perhaps slight improvements over simple linear dipoles are possible here when $L \approx \lambda$. Further, one may choose to use a low-order fractal pattern, rather than a high-order one (which is hard to construct). There may be slight advantages in appropriately chosen low-order fractal dipoles over a simple linear dipole antenna [6].

2.4 Antenna Reactance

The preceding discussion has emphasized only the radiation resistance (which is the real part of the antenna impedance if we ignore the Ohmic resistance R_{Ohm}). In general, antennas present a nonzero reactance (*i.e.*, imaginary part of the antenna impedance) to their power source. If the magnitude of the reactance is large compared to the radiation resistance, as is typically the case for small antennas, the rf power supply voltage must be larger than would be the case were the reactance equal to zero.

In practice, there is a preference for antennas whose reactance is small compared to their radiation resistance. The ideal case of zero reactance has come to be called “resonance”. The lowest resonant frequency for a center-fed dipole antenna of length L occurs when the wavelength is roughly $L/2$. At lower frequencies, the reactance of the dipole antenna is capacitive. Hence it is favorable to add an inductive reactance in series with a short dipole antenna to bring the total reactance close to zero.

Rather than using an external inductor, it is possible to modify the shape of the antenna so as to increase its inductive reactance, and correspondingly lower the (lowest) resonant frequency of the antenna.

A possible interest in fractal antennas is that they tend to have lower total reactance than a dipole antenna of the same overall size, and hence their resonant frequencies are lower. For example, a 3rd-order Hilbert fractal antenna can have resonant frequencies only 1/6 those of a dipole antenna of the same size [4]. This reduction in antenna reactance is achieved by the use of much longer conductors in the antenna, so the ordinary resistance of a fractal antenna can become significant if small diameter wires are used, thereby reducing the efficiency of the antenna.

Whether fractal antennas offer practical advantage over classic methods of controlling the antenna reactance (see, for example, secs. 21-2 and 21-5 of [1]) is a matter for detailed study, either in the laboratory or on a computer with a numerical electromagnetic code (NEC).

3 References

- [1] See, for example, chap. 13 of J.D. Kraus and R.J. Marhefka, *Antennas for All Applications*, 3rd ed. (McGraw-Hill, New York, 2002).
- [2] See, for example, sec. 9.2 of J.D. Jackson, *Classical Electrodynamics*, 3rd. ed. (Wiley, New York, 1999).
- [3] See, for example, sec. 2.1 of K.T. McDonald, *A Parallelogram Loop Antenna* (May 28, 2003), <http://puhep1.princeton.edu/~mcdonald/examples/loopantenna.pdf>
- [4] J. Anguera *et al.*, *The Fractal Hilbert Monopole: A Two-Dimensional Wire*, *Microwave and Optical Tech. Lett.* **36**, 2102 (2003), http://puhep1.princeton.edu/~mcdonald/examples/EM/anguera_motl36_102_03.pdf
- [5] C. Puente *et al.*, *Small but long Koch fractal monopole*, *IEE Electronics Lett.* **34**, 9 (1998), http://puhep1.princeton.edu/~mcdonald/examples/EM/puente_ieeel_34_9_98.pdf

- [6] See, for example, http://www.fractenna.com/nca_faq.html where it is stated: “It is well known that physical limitations impose severe field strength restrictions on electrically small antennas. And, when fractal element antennas are chosen to be very small (compared to a wavelength) they perform poorly – like all such small antennas. However, at the top side of the electrically small regime (say shrunk 2-4 times) fractal element antennas perform extremely efficiently and practically exceed other methods of antenna loading, including top loading.”

射频和天线设计培训课程推荐

易迪拓培训(www.edatop.com)由数名来自于研发第一线的资深工程师发起成立,致力并专注于微波、射频、天线设计研发人才的培养;我们于 2006 年整合合并微波 EDA 网(www.mweda.com),现已发展成为国内最大的微波射频和天线设计人才培养基地,成功推出多套微波射频以及天线设计经典培训课程和 ADS、HFSS 等专业软件使用培训课程,广受客户好评;并先后与人民邮电出版社、电子工业出版社合作出版了多本专业图书,帮助数万名工程师提升了专业技术能力。客户遍布中兴通讯、研通高频、埃威航电、国人通信等多家国内知名公司,以及台湾工业技术研究院、永业科技、全一电子等多家台湾地区企业。

易迪拓培训课程列表: <http://www.edatop.com/peixun/rfe/129.html>



射频工程师养成培训课程套装

该套装精选了射频专业基础培训课程、射频仿真设计培训课程和射频电路测量培训课程三个类别共 30 门视频培训课程和 3 本图书教材;旨在引领学员全面学习一个射频工程师需要熟悉、理解和掌握的专业知识和研发设计能力。通过套装的学习,能够让学员完全达到和胜任一个合格的射频工程师的要求...

课程网址: <http://www.edatop.com/peixun/rfe/110.html>

ADS 学习培训课程套装

该套装是迄今国内最全面、最权威的 ADS 培训教程,共包含 10 门 ADS 学习培训课程。课程是由具有多年 ADS 使用经验的微波射频与通信系统设计领域资深专家讲解,并多结合设计实例,由浅入深、详细而又全面地讲解了 ADS 在微波射频电路设计、通信系统设计和电磁仿真设计方面的内容。能让您在最短的时间内学会使用 ADS,迅速提升个人技术能力,把 ADS 真正应用到实际研发工作中去,成为 ADS 设计专家...

课程网址: <http://www.edatop.com/peixun/ads/13.html>



HFSS 学习培训课程套装



该套课程套装包含了本站全部 HFSS 培训课程,是迄今国内最全面、最专业的 HFSS 培训教程套装,可以帮助您从零开始,全面深入学习 HFSS 的各项功能和在多个方面的工程应用。购买套装,更可超值赠送 3 个月免费学习答疑,随时解答您学习过程中遇到的棘手问题,让您的 HFSS 学习更加轻松顺畅...

课程网址: <http://www.edatop.com/peixun/hfss/11.html>

CST 学习培训课程套装

该培训套装由易迪拓培训联合微波 EDA 网共同推出,是最全面、系统、专业的 CST 微波工作室培训课程套装,所有课程都由经验丰富的专家授课,视频教学,可以帮助您从零开始,全面系统地学习 CST 微波工作的各项功能及其在微波射频、天线设计等领域的设计应用。且购买该套装,还可超值赠送 3 个月免费学习答疑...

课程网址: <http://www.edatop.com/peixun/cst/24.html>



HFSS 天线设计培训课程套装

套装包含 6 门视频课程和 1 本图书,课程从基础讲起,内容由浅入深,理论介绍和实际操作讲解相结合,全面系统的讲解了 HFSS 天线设计的全过程。是国内最全面、最专业的 HFSS 天线设计课程,可以帮助您快速学习掌握如何使用 HFSS 设计天线,让天线设计不再难...

课程网址: <http://www.edatop.com/peixun/hfss/122.html>

13.56MHz NFC/RFID 线圈天线设计培训课程套装

套装包含 4 门视频培训课程,培训将 13.56MHz 线圈天线设计原理和仿真设计实践相结合,全面系统地讲解了 13.56MHz 线圈天线的工作原理、设计方法、设计考量以及使用 HFSS 和 CST 仿真分析线圈天线的具体操作,同时还介绍了 13.56MHz 线圈天线匹配电路的设计和调试。通过该套课程的学习,可以帮助您快速学习掌握 13.56MHz 线圈天线及其匹配电路的原理、设计和调试...

详情浏览: <http://www.edatop.com/peixun/antenna/116.html>



我们的课程优势:

- ※ 成立于 2004 年,10 多年丰富的行业经验,
- ※ 一直致力并专注于微波射频和天线设计工程师的培养,更了解该行业对人才的要求
- ※ 经验丰富的一线资深工程师讲授,结合实际工程案例,直观、实用、易学

联系我们:

- ※ 易迪拓培训官网: <http://www.edatop.com>
- ※ 微波 EDA 网: <http://www.mweda.com>
- ※ 官方淘宝店: <http://shop36920890.taobao.com>